

LogTag Recorders



SRIL-8 Single-Use Dry Ice Low Temperature Recorder

Using the LogTag[®] Interface and LogTag's freely available companion software LogTag Analyzer, the LogTag[®] Dry Ice Temperature Recorder is easily configured for recording conditions including delayed start, sampling interval, number of readings and configuration of conditions to activate the ALERT indicator.

The LogTag[®] Dry Ice "Probe-less" Temperature Recorder operates, measures and stores up to 8000 temperature readings in temperature environments ranging from -80°C to +40°C (-112°F to +104°F).

Intended for use in transit monitoring of articles stored in packaging incorporating dry ice cooling agents.

Available in single trip (SRIL-8) and multiple trip (TRIL 8) versions.

The Red Alert indicator provides an immediate indication, without access to a PC, if any readings are outside the limits specified at the time the unit was configured. Green OK indicator provides immediate visual confirmation, without access to a PC that the unit is operating.

Readings are downloaded using LogTag Analyzer which provides facilities for charting, zooming, listing data statistics and allows exporting the data to other applications such as Excel.

Product Highlights

- Records temperature from +40°C to as low as -80°C
- A real time clock provides date/time stamps for each temperature reading.
- Push-to-start button with optional delay or a specific time & date.
- Comprehensive customisation options including alert settings, sample interval and trip duration.
- Robust and durable polycarbonate case with lug for secure mounting.
- Up to 8,000 recordings - enough for the longest trip.
- In-transit inspections can be recorded at the push of a button.
- Industry best download time - less than 5 seconds for fully memory.

Recommended Applications

Cold Chain

Pharmaceuticals

Laboratories



Clinical Trials

Chemicals

Blood/Organs/Tissue

Manufacturing

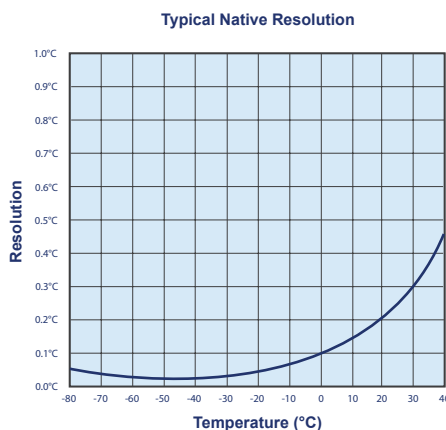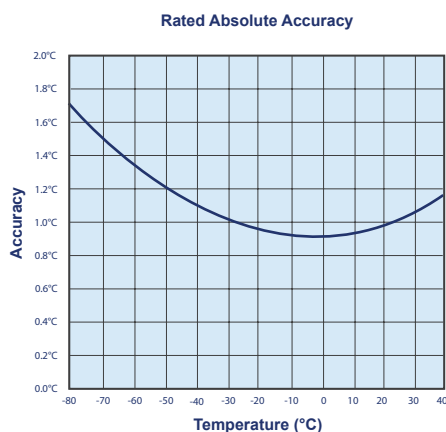


Accuracy/Resolution Charts



Specifications

Product Model	SRIL-8 (Single-use)
Measurement Range	-80°C ~ +40°C (-112°F ~ +104°F)
Rated Absolute Accuracy	Better than $\pm 1^{\circ}\text{C}$ for $-30^{\circ}\text{C} \sim +20^{\circ}\text{C}$ Better than $\pm 1.2^{\circ}\text{C}$ for $-45^{\circ}\text{C} \sim -30^{\circ}\text{C}$ & $+20^{\circ}\text{C} \sim +40^{\circ}\text{C}$ Better than $\pm 1.7^{\circ}\text{C}$ for $-80^{\circ}\text{C} \sim -45^{\circ}\text{C}$
Typical Native Resolution	< than 0.1°C for $-80^{\circ}\text{C} \sim +0.0^{\circ}\text{C}$ < than 0.2°C for $-0.0^{\circ}\text{C} \sim +20^{\circ}\text{C}$ < than 0.5°C for $+20^{\circ}\text{C} \sim +40^{\circ}\text{C}$
Capacity	8000 temperature readings (16K bytes memory)
Sampling Interval	Adjustable, 1~60 minutes or 1~18 hours
Environmental	IP65 (roughly equivalent to NEMA 4)
Power Source	3.6V low temperature chemistry Lithium battery
Battery Life	Minimum storage life of 12 months before 'start'. Rated for up to 1000 hours of exposure to -80°C .
Size	86mm(H) x 54.5mm(W) x 8.6mm(T)
Weight	35g
Case Material	Polycarbonate

Compliance & Certifications

	Designed to support Digital Signatures in accordance with FDA CFR21 Part 11.
	Tested and complies with FCC Part 15 Subparts A and B. Tested and complies with EC EMC directives (EN 50081-1:1992 & EN 61000-6-1:2001)
	Conforms to RoHS (Restriction of the use of certain Hazardous Substances in electrical and electronic equipment) EU Directive.

Accessories



Protective Enclosure



Wall Mount Bracket

Our FREE LogTag Analyzer software provides an easy to use, powerful platform for configuring any LogTag recorder product before deployment and for data download & analysis when the recorder is retrieved.



LogTag's unique interface cradle design provides rapid & reliable LogTag data transfer.

Note: Users do not need to purchase more than one Interface Cradle per LogTag product.