



Measurement, monitoring and metrology



CONNECTED SENSORS FOR A SIMPLE, CONTINUOUS QUALITY CONTROL

Automation | Real-time alerts | Centralized supervision | Compliance with the regulations

www.jri-corp.com

Next generation of connected sensors

Our new generation of connected temperature sensors monitors sensitive products stored in fixed and mobile cabinets. It enables you to meet the requirements of ISO 17025 and ISO EN 15189 standards with reliable and accurate measurements.



Measuring of various parameters
Temperature, Humidity, Parcel opening, Delta pressure, etc...

Real-time Alarms
The sensors have operating and warning **light indicators**. Alerts are sent by **SMS text message, e-mail and voice message** according to your alerts planning.




Easy installation and use
Miniaturized, the sensors can be placed **as close as possible to your products** or wall-fixed with their **integrated magnet**. They are detected automatically on the JRI MySirius platform. Color rings allow to quickly determine the configuration of each sensor.

10 000 data points recording
The sensors are equipped with an **internal memory** able to record up to 10 000 data points.

Simplified Metrology
Calibration of the temperature sensor can be realized through **replacement by a newly calibrated one**.

Automated monitoring of fixed and mobile units with performance and adaptability

- Refrigerators, Freezers
- Incubators, Ovens
- Climatic cabinets
- Cryo-preserved
- Cold rooms
- Storage warehouses
- Insulated cases
- Refrigerated vehicles

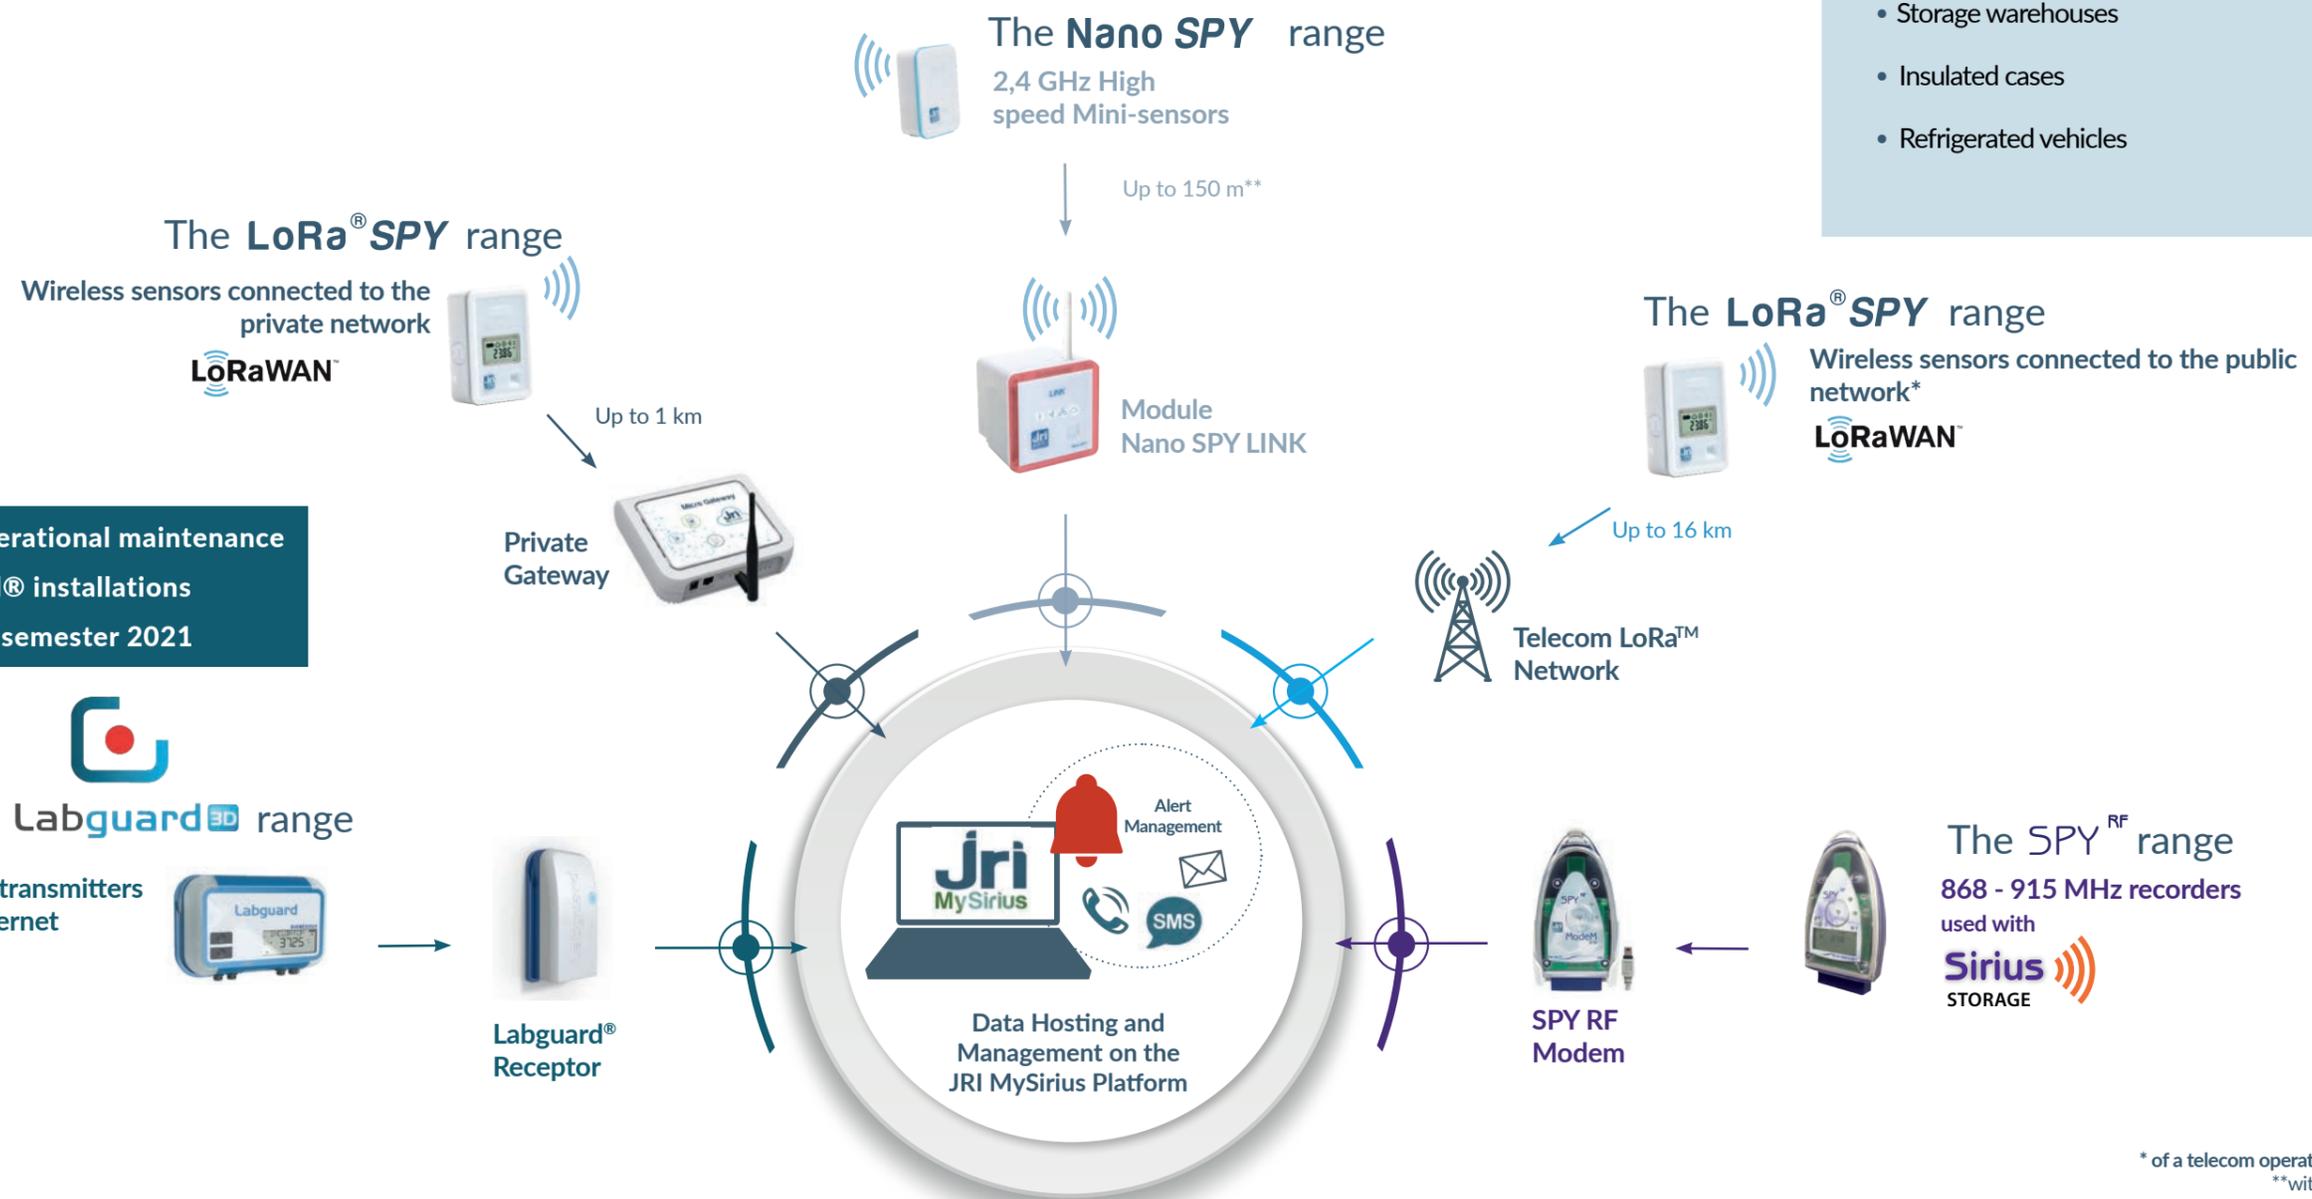

Integration and operational maintenance of Labguard® installations from the 1st semester 2021



The Labguard[®] 3D range

Radio transmitters or Ethernet



Labguard[®] Receptor

* of a telecom operator member of the LoRa Alliance
**with Nano SPY Alarm relay module



Nano SPY

The range of high speed 2,4 GHz mini wireless sensors

- Temperature and humidity monitoring
- True wireless sensor suitable for the monitoring of units and transport cases
- Battery life up to 6 years
- Visual alerts via the warning light indicator of the Nano SPY LINK, in case of alarm
- Bluetooth communication between the Nano SPY LINK and a smartphone or tablet equipped with the MyNanoView mobile app
- Particularly suitable for critical cabinets that require high measurement frequency



Dimensions : 63x42x25mm

<p>COMPLIES NFEN 12830 H/L/M</p>	<p>Nano SPY T1</p> <p>Mini temperature sensor that can be placed directly inside the refrigerator or the freezer (IP 68)</p> <p><u>Measurement range</u> : -40°C to +85°C <u>Accuracy</u> : ±0.4°C from -20°C to +40°C and ±0.5°C out of this range</p>		<p>Nano SPY Twin</p> <p>Mini temperature sensor measuring at 2 different points in a cabinet</p> <p><u>Measurement range</u> : <i>Internal probe</i> -40°C to +85°C <i>External probe</i> -50°C to +105°C <u>Accuracy</u> : <i>Internal probe</i> ±0.4°C from -20°C à +40°C and ±0.5°C out of this range <i>External probe</i> ±0.2°C from +30°C to +50°C and ±0.5°C out of this range</p>		<p>Nano SPY TH</p> <p>Mini temperature & humidity (ambient) sensor particularly adapted for HVAC applications</p> <p><u>Measurement range</u> : 30°C to +70°C and 0 -100% RH <u>Accuracy</u> : ±0.4°C from -20°C to +40°C and ±0.5°C out of this range ±3% RH from 20% to 80% ±5% RH from 0% to 20% and from 80% to 100%</p>						
<p>Standard Version Incubator Version</p>	<p>Nano SPY T2</p> <p>Mini temperature sensor with external flat probe cable to be placed through the door seal, designed for refrigerators and freezers</p> <p><u>Measurement range</u> : -50°C to +105°C <u>Accuracy</u> : <i>Standard</i> ±0.3°C from -20°C to +30°C and ±0.5°C out of this range <i>Incubator</i> ±0.2°C from +30°C to +50°C and ±0.5°C out of this range</p>	<p>IP67 Universal connector in option</p>	<p>Nano SPY U</p> <p>Universal analog input sensor recording data coming from analog probes for monitoring temperature, humidity, CO₂...</p> <p><u>Type of input</u> : PT100, 0-20mA / 4-20 mA, 0-1 V, On/Off or counting <u>Measurement range and Accuracy</u> : depending on the probe model</p>		<p>Nano SPY T3</p> <p>Mini extreme temperature sensor that can be fixed outside of the cabinet thanks to its magnet</p> <table border="1"> <thead> <tr> <th>Low temperature</th> <th>High temperature</th> </tr> </thead> <tbody> <tr> <td><u>Measurement range</u> : -200°C to 0°C</td> <td><u>Measurement range</u> : 0°C to 100°C</td> </tr> <tr> <td><u>Accuracy</u> : ±0.2°C from -20°C to 0°C and ±0.5°C out of this range</td> <td><u>Accuracy</u> : ±0.3°C from 0°C to +100°C and ±0.5°C out of this range</td> </tr> </tbody> </table>	Low temperature	High temperature	<u>Measurement range</u> : -200°C to 0°C	<u>Measurement range</u> : 0°C to 100°C	<u>Accuracy</u> : ±0.2°C from -20°C to 0°C and ±0.5°C out of this range	<u>Accuracy</u> : ±0.3°C from 0°C to +100°C and ±0.5°C out of this range
Low temperature	High temperature										
<u>Measurement range</u> : -200°C to 0°C	<u>Measurement range</u> : 0°C to 100°C										
<u>Accuracy</u> : ±0.2°C from -20°C to 0°C and ±0.5°C out of this range	<u>Accuracy</u> : ±0.3°C from 0°C to +100°C and ±0.5°C out of this range										
<p>Peripheral</p> <p>Nano SPY LINK</p> <ul style="list-style-type: none"> • Transmission module of measurements collected by the Nano SPY sensors to the JRI MySirius platform via a Wifi or Ethernet network (or BLE) • The Bluetooth BLE option allows to communicate with a tablet equipped with the MyNanoView app • Power supply and battery backup 	<p>Accessories</p> <div style="display: flex; justify-content: space-between;"> <div data-bbox="801 1633 1409 2011"> <p>Nano SPY ALARM/ RELAY</p> <ul style="list-style-type: none"> • Audio and visual alert module • Quadruples the communication distance with a Nano SPY LINK and then allows to multiply the radio range between the Nano SPY sensors and a Nano SPY LINK module • Connects an external monitoring module to the dry contact outlet • Power supply and battery backup </div> <div data-bbox="1409 1633 1938 2011"> <p>Nano SPY Bridge</p> <ul style="list-style-type: none"> • Transmits data from one Nano SPY when the distance from the Nano SPY LINK is too important • Battery operation <p>Protective shell and fixation</p> </div> </div>		<p>Reference device for Nano SPY sensors calibration</p> <p>Nano SPY Reference</p> <p>Mini temperature sensor with high precision suitable for monitoring equipments with very restricted MPE</p> <p><u>Measurement range</u> : -196°C to +150°C <u>Accuracy</u> : ±0.15°C from 0°C to +40 °C ±0.2°C from -30°C to 0°C and from +40°C to +150°C ±0.5°C out of this range ±0.6°C at -196°C</p>								




LoRa® SPY

Wireless long range sensors connected to the LoRaWAN™ network

- **Data transmission via the LoRaWAN™ network :**
 - via the network of a private gateway
 - via the network of a telecom operator member of LoRa Alliance™ (if available)
- **Particularly suitable for monitoring:**
 - Sites with low sensor concentration
 - Storage areas spread on a wide territory
 - A need of real-time* transportation
- **Radio range up to 16 km in open field**
- **Very low power consumption** (battery life up to 2 years)
- **Direct reading on the LCD display**

Dimensions : 87x64x25mm

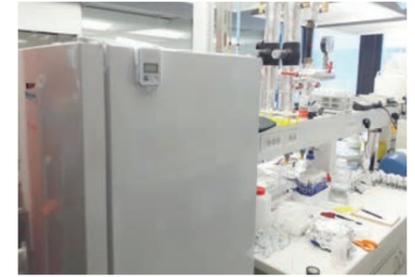

LoRa® SPY T1

Temperature and parcel opening sensor suitable for transportation/logistics and storage areas monitoring

Measurement range : -30°C to +70°C
Accuracy : ±0.4°C from -20°C to +40°C and ±0.5°C out of this range



LoRa® SPY T2 Standard

Temperature sensor with external flat cable probe to be placed through the door seal, designed for refrigerators and freezers

Measurement range : -50°C to +105°C
Accuracy : ±0.3°C from -20°C to +30°C and ±0.5°C out of this range



LoRa® SPY T2 Incubator

Temperature sensor with external flat cable probe to be placed through the door seal, dedicated to incubators

Measurement range : -50°C to +105°C
Accuracy : ±0.2°C from +30°C to +50°C and ±0.5°C out of this range



LoRa® SPY T0

Temperature sensor without display designed for cold chain monitoring during transport

Measurement range : -35°C to +85°C
Accuracy : ±0.5°C from -20°C to +30°C and ±0.8°C out of this range



LoRa® SPY Digital

Sensor with external digital temperature and humidity probe designed to simplify calibration operations by replacing the probe with a newly calibrated one

Measurement range and Accuracy : -200°C to +85°C depending on the JRI digital probe



LoRa® SPY U

Universal analog input sensor recording data coming from analog probes for monitoring temperature, humidity, CO₂, O₂, pressure...

Type of entry : PT100, 4-20 mA/0-20mA, 0-1V, On/Off or counting
Measurement range and Accuracy : depending on the probe model



LoRa® SPY TH

Temperature and humidity sensor suitable for HVAC applications and warehouse storage

Measurement range : -30°C to +70°C and 0 - 100% RH
Accuracy : ±0.4°C from -20°C to +40°C and ±0.5°C out of this range
±3% RH from 20% to 80% and ±5% RH outside



LoRa® SPY Reference

Temperature sensor with high precision perfectly suitable for monitoring equipments with very restricted MPE

Measurement range : -196°C to +150°C
Accuracy : ±0,12°C from 0 to +50°C
±0,20°C from -30°C to 0°C and from +50°C to +150°C
±0,50°C out of these ranges

Reference device for performing LoRa® SPY sensor calibrations



LoRa® SPY T3

Extreme temperature sensor designed to monitor low temperature freezers

Measurement range : -200°C to 0°C
Accuracy : ±0.2°C from -20°C to 0°C
±0.5°C out of this range



LoRa means «Long Range». It is a technology that allows the Internet of things to transmit small-sized data measurements on a long distance, using a low power consumption.

Accessory



Protection and sealing box

Gateway



Gateway LoRa™ JRI

Allows to set up a private LoRa network for transferring the data recorded by the LoRa® SPY sensors to the JRI MySirius platform. Available in 4G and Ethernet version.

*subject to coverage by the operator network.



A modular and customizable supervision platform

Measurements are automatically uploaded to the secure JRI MySirius Cloud to be hosted and operated on a user-friendly and intuitive interface.

Application available in modes :




Customized interface

- Different indicators and favorites
- Optional modules adapted to different users' needs: Maintenance, Metrology, Map, Active Directory, etc...

Customized user profile management

- Unlimited number of users
- Different rights to assign per profile : Managers, Supervisors, Users, Metrologists, etc.

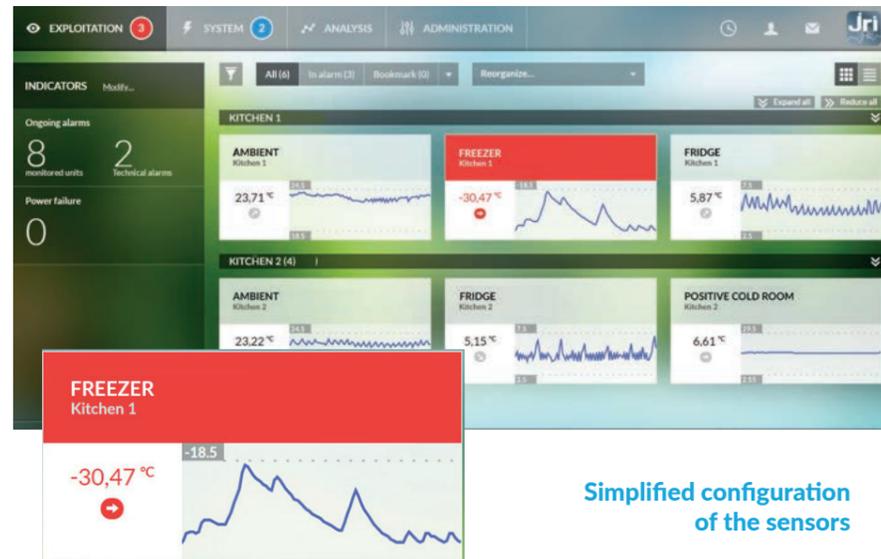

Simplified configuration of the sensors

Access to data 24/7

Your data is accessible wherever you are and you can share it with your colleagues over different countries.

Programmed updates to give you more time to prepare your partial qualifications and training of your teams.

(JRI cloud-based version only)

Compatibility with Metrolog Calibration and Mapping software

JRI MySirius data can be imported to allow you to perform your metrology operations.

Data integration

in third party software (via web API)

We ensure the protection of the data hosted on the JRI MySirius platform with Microsoft's Azure solution, ISO 27 001 certified and approved for Health data storage.



Mobile apps to view measurements and manage alerts




Wide range of alarm options management

Multi-cascade, report using the snooze key, temporary inhibition...




View in «Map» mode to easily locate all your equipments on a map and obtain information on every monitored units.

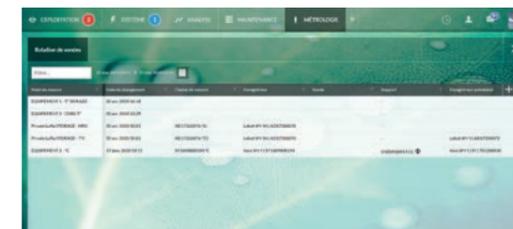

Metrology management of your sensor fleet

- Consultation and metrology management of your sensor fleet: calibration, checking, mapping...
- Nano SPY and LoRa SPY sensors can be adjusted in the Maintenance module.

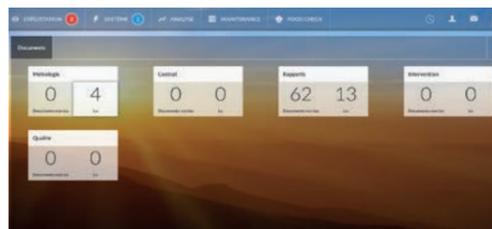

Document space dedicated to metrology reports and all other JRI documents concerning your system.

MyNanoView

Bluetooth Communication

Simple and intuitive screen of measurements data of Nano SPY mini-sensors

- Visualization of measurements in graphs and tables
- Continuous display of Nano SPY data near the Nano LINK module
- Operation without Internet connection to ensure the monitoring of your site even in case of computer network failure
- Use in remote screen mode to dedicate to a zone or in nomadic mode to perform spot checks

MySiriusAlert

Mobile app for alarm management of Nano SPY and LoRa® SPY connected sensors

- Alert notifications
- Consultation and acknowledgement of the current alarms
- Visualization of the measurements of your monitored chambers
- Modification of the sensor settings: alarm inhibition, changing of threshold values with predefined configuration modes, etc...





Related services

Three service levels are proposed to manage the collected data by our connected sensors.

We supply the JRI MySirius solution with a wide range of services realized by our distribution network: installation, commissioning, qualification, training, metrology services and maintenance operations.



Subscriptions

	INITIAL	SERENITY	ADVANCED
SERVICES			
Data reading (maximum) measurements, graphs, history	The last 2 months	The last 18 months	The last 5 years
Data archives Data reading period included	The last 12 months	The last 3 years	The last 10 years
Technical support Online help, tutorial	✓	✓	✓
Number of user accounts	2	Unlimited	Unlimited with customizable profiles
21 CFR Part 11 Compliance			✓
Audit trail		Alarm audit trail	Full trail
FEATURES			
Core Temperature Simulation		✓	✓
Metrology Fleet view and management		✓	✓
Adjustment	✓	✓	✓
Documents Reports, metrology documents	✓	✓	✓
Update delay			✓
OPTIONAL MODULES			
Connectivity module (Web API)	✓	✓	✓
Active Directory Synchronisation		✓	✓
Maps		✓	✓
Maintenance	✓	✓	✓



Metrology

Our in-house metrology laboratory is ISO 17025 (Cofrac) accredited in temperature for :

- calibration and checking in temperature from -80°C to +200°C and at -196°C in the laboratory, and from -90°C to +140°C on site (accreditation N°2.1943 -range available on www.cofrac.fr)
- mapping and checking according to the FD X 15140, NF EN 60068 and FDV 08 601 standards of the thermostatic chambers in the temperature range from -196°C to +140°C and water baths in the temperature range from -90°C to +140°C (accreditation N°1.2471-range available at www.cofrac.fr)



Mobile unit of our ISO 17025 accredited laboratory, the Lab'express works on site to perform several metrology services simultaneously during an intervention:

- chambers mapping
- probes calibration

SIMPLIFIED METROLOGY MAINTENANCE

The exclusive properties of our digital temperature probes and Nano SPY mini-sensors make it possible to perform the **calibration by simple exchange with a probe newly calibrated in our laboratory, without stopping the monitoring** of your equipment.



SIMPLICITY
Remove the old and replace with a calibrated one



COMPLIANCE
Compliance with the obligation of calibration



SAVING TIME
No interruption of the monitoring



ECONOMY
No travel expenses

Maintenance

Our maintenance contracts provide the necessary interventions to maintain your installation in operational conditions and are carried out by our team of experienced distributors :

- Technical hotline access,
- Extension of guarantee on hardware and software,
- Remote maintenance of your application,
- On-site maintenance and support

Trainings

The JRI Academy performs training sessions for all levels : monitoring systems, metrology and skills transfer.





Play the JRI MySirius solution video !



Follow us



www.jri-corp.com | info@group-mms.com

Distributed by



2 rue de la Voivre
25 490 Feschés-le-Château - France
Tél.: +33 (0)3 81 30 68 04
www.jri-corp.com | info@group-mms.com



Our partnerships



A company of the **MMS** Group
Metrology & Monitoring Solutions